

MAGDRIVE NEMP270/17




ROTALUTION

Principal Applications

For heavy duty applications requiring safe, leak-free, continuous flow of aggressive chemicals, acids, solvents, alkalis, sterile and chilled fluids.

Wetted Materials

- Standard EPDM O Ring, Nitrile or Viton optional
- PP encapsulated magnet, PVDF optional
- PP pump housing, PVDF optional
- PPS spindle housing, PVDF and PP optional
- Alumina ceramic spindle & thrust washers
- Graflon bushes, Rulon optional

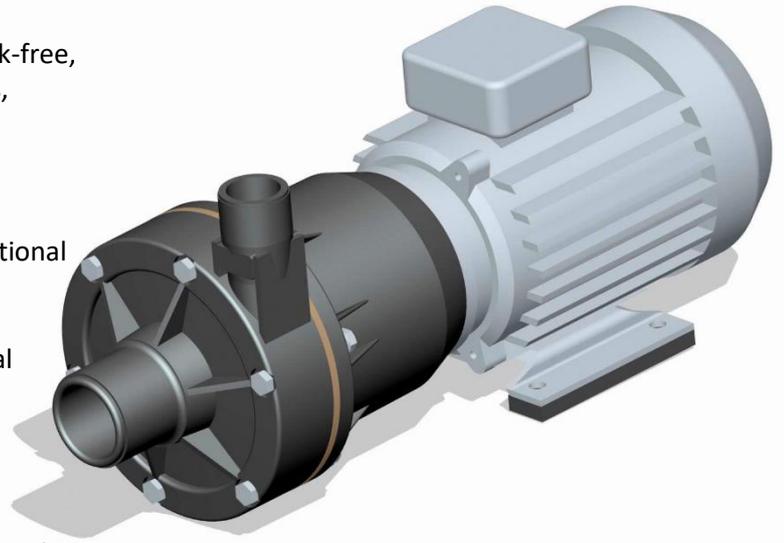

Features


- Manufactured in chemical resistant thermo-plastics – entirely non-metallic
- Magnetic couplings provide an energy efficient thermal shield, minimising heat transfer to the pumped fluid
- IP55 standard motor housing
- High SG version available
- 1 ½" BSP M inlet 1" BSP M outlet

Motor

3 phase IEC motor 1100 W
B14 Foot & Face

Dimensions

Drawings not to scale
Dimensions in millimetres

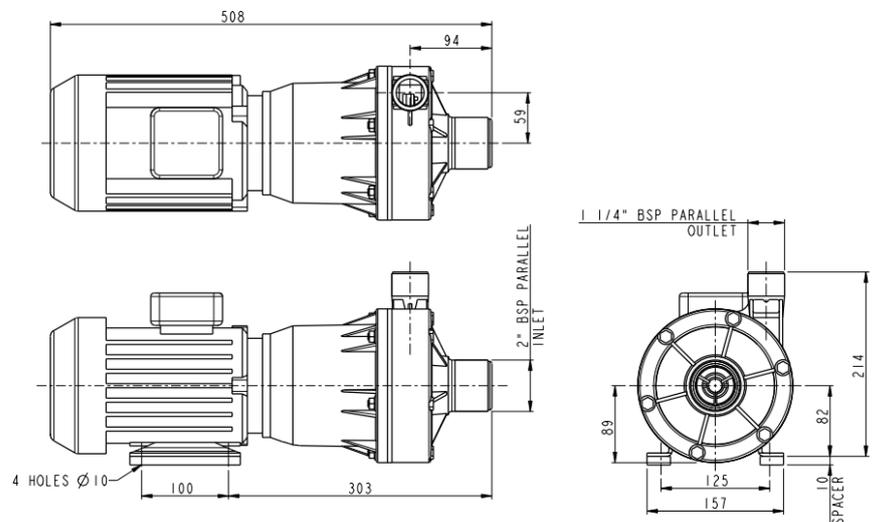

Specifications


Model	Overall Height (mm)	Overall Length (mm)	Overall with (mm)	Weight (kg)	Max Body pressure (bar)	Run-out flow rate (l/min)	Closed valve head (m)	Temp Range (degC)	*Max specific gravity	Motor Output (watts)
NEMP270/17	214	508	174	22	3,0	300	16,5	-20 to +85	1.2	1100

*Assuming maximum viscosity of 30cp



MAGDRIVE NEMP270/17

Performance

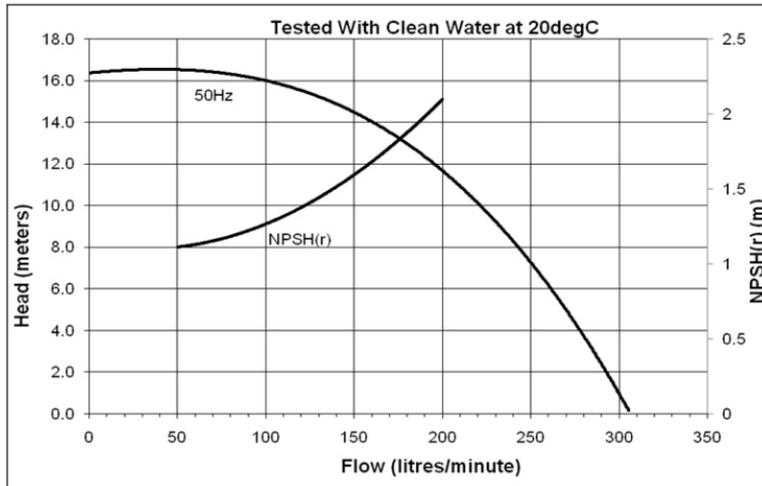


NOTE: These magnetically coupled pumps are designed for use with clean fluids.

Solids will cause jamming. Abrasives will reduce pump life and invalidate the warranty.

NEMP pumps are not self priming and are not designed to run dry.

The company reserves the right to change specifications.

Part List

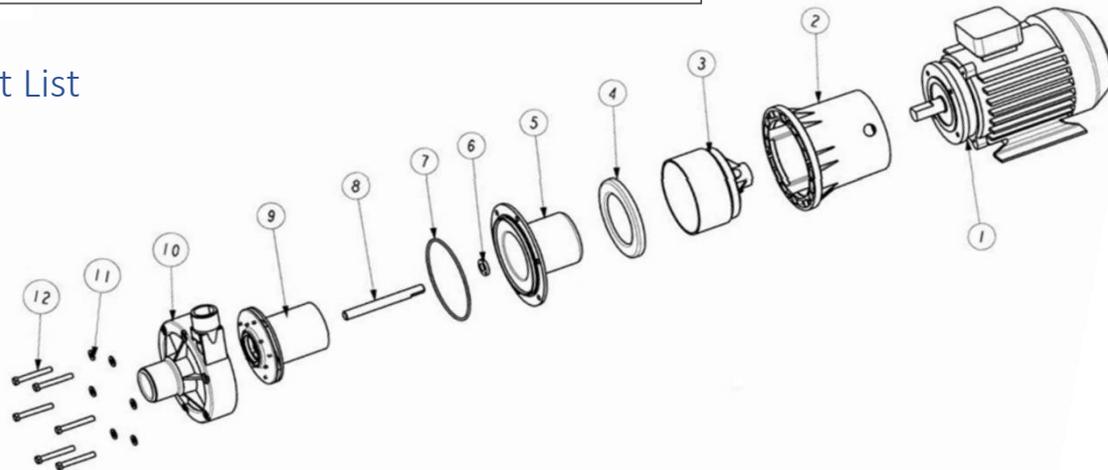

Item Number	Description	Quantity	Part Number		
1	Motor	1	008872		
2	Adaptor	1	028324		
3	Drive Magnet	1	038640		
4	Support plate	1	008324		
5	Spindle housing	1	018319 (PPS)	008335 (PVDF)	028300 (PP)
6	D washer	1	008330		
7	O ring	1	008277 (EPDM)	008235 (Vition)	
8	Spindle	1	008329		
9	Impeller	1	038646 (PP)	038647 (PVDF)	
10	Pump Body	1	018371 (PP)	008659(PVDF)	
11	washer	6	001575		
12	Screw	6	031109		