MAGDRIVE NEMP300/20



Principal Applications

For heavy duty applications requiring safe, leak-free, continuous flow of aggressive chemicals, acids, solvents, alkalis, sterile and chilled fluids.

Wetted Materials

• Standard EPDM O Ring, Nitrile or Viton optional

PP encapsulated magnet, PVDF optional

PP pump housing, PVDF optional

PPS spindle housing, PVDF and PP optional

Alumina ceramic spindle & thrust washers

• Graflon bushes, Rulon optional

Features


- Manufactured in chemical resistant thermo-plastics entirely non-metallic
- Magnetic couplings provide an energy efficient thermal shield, minimising heat transfer to the pumped fluid
- IP55 standard motor housing
- High SG version available
- 2 " BSP M inlet 1 ¼ " BSP M outlet

Motor

3 phase IEC motor 1500 W B14 Foot & Face

Dimensions

Drawings not to scale
Dimensions in millimetres

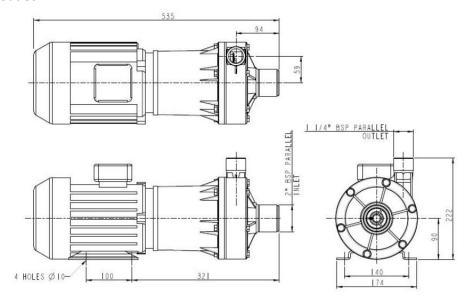

Specifications


| Model | Overall | Overall | Overall | Weight | Max Body | Run-out | Closed | Temp Range | *Max | Motor |
|------------|---------|---------|---------|--------|----------|-----------|----------|------------|----------|---------|
| | Height | Length | with | (kg) | pressure | flow rate | valve | (degC) | specific | Output |
| | (mm) | (mm) | (mm) | | (bar) | (I/min) | head (m) | | gravity | (watts) |
| NEMP300/20 | 222 | 535 | 174 | 18 | 3,0 | 350 | 21 | -20 to +85 | 1.2 | 1500 |

^{*}Assuming maximum viscosity of 30cp

MAGDRIVE NEMP300/20

ROTALUTION

Performance

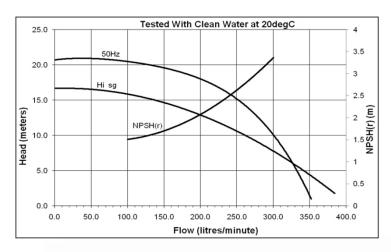


NOTE: These magnetically coupled pumps are designed for use with clean fluids.

Solids will cause jamming. Abrasives will reduce pump life and invalidate the warranty.

NEMP pumps are not self priming and are not designed to run dry.

The company reserves the right to change specifications.

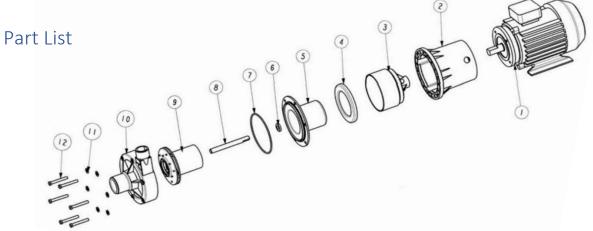

| - 6 | | | | | | | | |
|----------------|------------------------|------------------|-----------------|---------------------|------------------------|--------------|--|--|
| Item Number | Description | Quantity | Part Number | | | | | |
| 1 | Motor | 1 | 108873 | | | | | |
| 2 | Adaptor | 1 | 018376 | | | | | |
| 3 | Drive Magnet 1 038634 | | | | | | | |
| 4 | Support plate | 1 | 008324 | | | | | |
| 5 | Spindle housing | housing 1 018319 | | 008335 (PVDF) | | 028300 (PP) | | |
| 6 | D washer | 1 | 008330 | | | | | |
| 7 | O ring 1 008277 (EPDM) | | 1) | 008235 (Vition) | | | | |
| 8 | Spindle | 1 | | 008329 | | | | |
| 9 | 9 Impeller | | Н | | 008387 (PP High SG) | | | |
| | | | 018637 (PVDF 50 | 038647 (PVDF 60 HZ) | | 028625 (PVDF | | |
| | | | HZ) | | | High SG) | | |
| 10 | Pump Body | 1 | 018371 (PP) | 018371 (PP) | | 008659(PVDF) | | |
| 11 | washer | 8 | 001575 | | | | | |
| 12 | Bolt | 6 | 031109 | | | | | |